



大功率磁力搅拌器

HIGH POWER MAGNETIC STIRRER



90-1



96-1

▶ 技术参数 Technical parameters

电源: Power:	AC220V±10% 50Hz	AC220V±10% 50Hz
电机功率: Motor power:	40W	100W
电机转矩: Motor torque:	160mN·M	500mN·M
搅拌点位数: Number of stirring points:	1	1
最大搅拌容量(水): Maximum stirring capacity:	20~20000ml	20~50000ml
搅拌转速: Stirring speed:	50-2000r/min	50-2000r/min
工作盘材质: Work plate material:	不锈钢	不锈钢
外壳防护等级: Housing protection class:	IP21	IP21
重量: Weight:	7KG	11.5KG
外形尺寸: Dimension:	308x303x90mm (不包括表杆)	410x400x115mm (不包括表杆)
允许环境温度: Allowable ambient temperature:	0~40°C	0~40°C
允许相对湿度: Allowable relative humidity:	80%	80%
附件: 搅拌子1支。 Attachment: Stira single set.		

大功率磁力搅拌器

HIGH POWER MAGNETIC STIRRER

96-2

▶ 技术参数 Technical parameters

电源: Power:	AC220V±10% 50Hz
电机功率: Motor power:	100W
电机转矩: Motor torque:	500mN·M
搅拌点位数: Number of stirring points:	1
最大搅拌容量(水): Maximum stirring capacity:	20~50000ml
搅拌转速: Stirring speed:	50-2000r/min
速度显示: Speed display:	数码管 Digital tube
工作盘材质: Work plate material:	不锈钢
外壳防护等级: Housing protection class:	IP21
重量: Weight:	11.5KG
外形尺寸: Dimension:	410x400x115mm (不包括表杆)
允许环境温度: Allowable ambient temperature:	0~40°C
允许相对湿度: Allowable relative humidity:	80%
附件: 搅拌子1支。 Attachment: Stira single set.	




大功率恒温磁力搅拌器

HIGH POWER THERMOSTATIC MAGNETI

90-1B

▶ 技术参数 Technical parameters

电源: Power:	AC220V±10% 50Hz	控温精度: The temperature control accuracy:	±0.5°C
电机功率: Motor power:	40W	加热速率: Heating rate:	65k/min
电机转矩: Motor torque:	160mN·M	工作盘材质: Work plate material:	铝镀膜 Aluminized black
搅拌点位数: Number of stirring points:	1	加热盘尺寸: Heating disk size:	φ300mm
最大搅拌容量(水): Maximum stirring capacity:	20~20000ml	传感器: Sensors:	PT100
搅拌转速: Stirring speed:	50-2000r/min	外壳防护等级: Housing protection class:	IP21
外接加热功率: External heating power:	2000W	重量: Weight:	12.7KG
温度显示: Temperature display:	数码管 Digital tube	外形尺寸: Dimension:	350x350x200mm (不包括表杆)
加热温度范围: Heating temperature range:	室温 ~330°C (超温保护 400°C) Room temperature ~330°C (over temperature protection 400°C)	允许环境温度: Allowable ambient temperature:	0~40°C
液体温度范围: Liquid temperature range:	室温 ~250°C At room temperature to 250°C	允许相对湿度: Allowable relative humidity:	80%
附件: 长、短表杆各1根, 温度传感器及支架1套, 搅拌子1个。 Attachment: Long,short watch rod one, Temperature sensor and bracker one Stir the particles.			

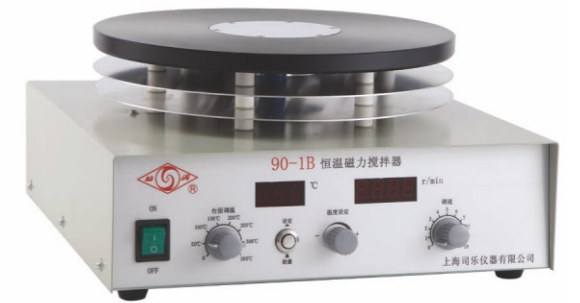

多工位恒温磁力搅拌器

Multi-station ConstantTemperature Magnetic Stirrer

T09-1S

▶ 技术参数 Technical parameters

电源: Power:	AC220V±10% 50Hz	加热盘尺寸: Heating disk size:	φ140mm
电机功率: Motor power:	20W	加热速率: Heating rate:	100k/min
电机转矩: Motor torque:	40mN·M	工作盘材质: Work plate material:	不锈钢镀黑 Stainless steel blackening
搅拌点位数: Number of stirring points:	4	传感器: Sensors:	PT100 (外置和内置)
最大搅拌容量(水): Maximum stirring capacity:	20~5000mlx4	外壳防护等级: Housing protection class:	IP21
搅拌转速: Stirring speed:	50-2000r/min	重量: Weight:	12.7KG
温度显示: Temperature display:	数码管 Digital tube	外形尺寸: Dimension:	350x350x200mm (不包括表杆)
加热温度范围: Heating temperature range:	室温 ~330°C (超温保护 400°C) Room temperature ~330°C (over temperature protection 400°C)	允许环境温度: Allowable ambient temperature:	0~40°C
液体温度范围: Liquid temperature range:	室温 ~250°C At room temperature to 250°C	允许相对湿度: Allowable relative humidity:	80%
控温精度: The temperature control accuracy:	±0.1°C	电机保护: Motor protection:	堵转、过流保护、自恢复 Blocked rotation, over current protection, self recovery
附件: 长、短表杆各1根, 温度传感器及支架1套, 搅拌子 1 PCSx4。 Attachment: Long,short watch rod one, Temperature sensor and bracker four Stir the particles.			

